

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/087395 A1**

(51) International Patent Classification<sup>7</sup>: **B08B 1/00**, 1/04, 3/02, 5/04, 1/02, B65G 45/10

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/GB2005/000910

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

(30) Priority Data:  
0405571.1 12 March 2004 (12.03.2004) GB

(71) Applicant and  
(72) Inventor: **HANDY, Keith, David** [GB/GB]; Granville House, Granville Terrace, Stone, Staffordshire ST15 8DF (GB).

(74) Agents: **SALES, Robert** et al.; Swindell & Pearson, 48 Friar Gate, Derby DE1 1GY (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CLEANING ASSEMBLY

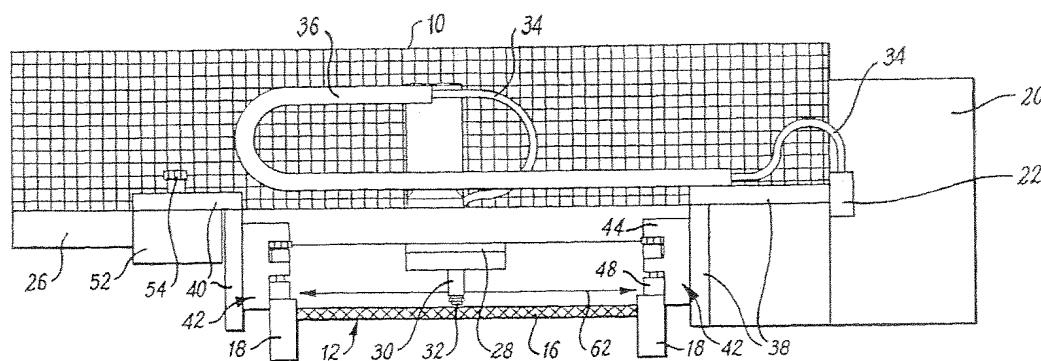

**WO 2005/087395 A1**

(57) **Abstract:** A portable conveyor cleaning assembly (10) with adjustable first and second end assemblies (38, 40) selectively mountable on respective sides of different width conveyors (12, 14). A carriage (28) is movable reciprocally over the conveyor (12, 14) to direct a cleaning fluid onto the conveyor, with the degree of reciprocal movement being adjustable to suit a particular conveyor.